



*"If you can imagine it, Nadco will make it Stick."*®


## 3243 High Temperature Foil Tape

### Information Sheet

#### Product Description

NADCO® High Temperature Foil Tape 3243 is a 2 mil (50 µm) dead soft aluminum foil coated with a high temperature, extremely aggressive solvent acrylic pressure sensitive adhesive. Specifically designed for high heat flue closure applications, NADCO® tape 3243 applies easily to sheet metal ducts on flat and irregular surfaces and excels in demanding temperature applications, providing good performance and durability over a wide range of environmental conditions.

#### Product Construction

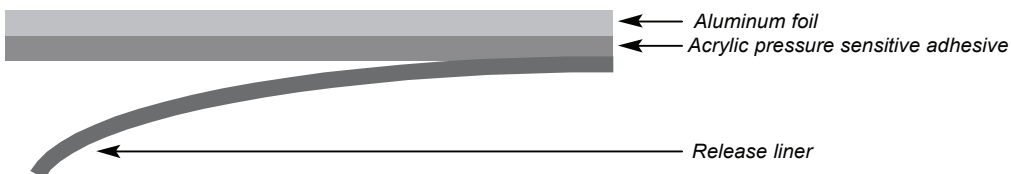

#### Features & Benefits

- UL723 Listed
- High temperature, high performance duct closure tape is specifically designed for use as a flue pipe closure tape
- May be used as a heat shield for welding
- High performance solvent acrylic adhesive performs well over a wide temperature range
- Hand tearable allows for easy installation

#### Typical Physical Properties

If technical data is required, please contact your NADCO® sales professional or customer service representative to enter a technical service request for the specific data needed.

---

**Technical Information** The technical information, recommendations and other statements contained in this document are based upon tests or experience that NADCO® believes are reliable, but the accuracy or completeness of such information is not guaranteed.

---

**Product Use** Many factors beyond NADCO®'s control and uniquely within user's knowledge and control can affect the use and performance of a NADCO® product in a particular application. Given the variety of factors that can affect the use and performance of a NADCO® product, user is solely responsible for evaluating the NADCO® product and determining whether it is fit for a particular purpose and suitable for user's method of application.

---

**Warranty, Limited Remedy, and Disclaimer** Unless an additional warranty is specifically stated on the applicable NADCO® product packaging or product literature, NADCO® warrants that each NADCO® product meets the applicable NADCO® product specification at the time NADCO® ships the product. NADCO® MAKES NO OTHER WARRANTIES OR CONDITIONS, EXPRESS OR IMPLIED, INCLUDING, BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OR CONDITION OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE OR ANY IMPLIED WARRANTY OR CONDITION ARISING OUT OF A COURSE OF DEALING, CUSTOM OR USAGE OF TRADE. If the NADCO® product does not conform to this warranty, then the sole and exclusive remedy is, at NADCO®'s option, replacement of the NADCO® product or refund of the purchase price.

---

**Limitation of Liability** Except where prohibited by law, NADCO® will not be liable for any loss or damage arising from the NADCO® product, whether direct, indirect, special, incidental or consequential, regardless of the legal theory asserted, including warranty, contract, negligence or strict liability.

---